


Changing the S1/S2 IP Address for the Nortel 1140E & 1120E Phones

Steps

1. Rapidly press the **Services** key twice and proceed to the next step.
2. Press the **3** key to enter the **Network Configuration** menu.
3. Press the **Right Arrow** key until you are at **S1 IP**. Press the **Select** key and then enter the appropriate IP address. Once finished, pressed the **Select** key to store.

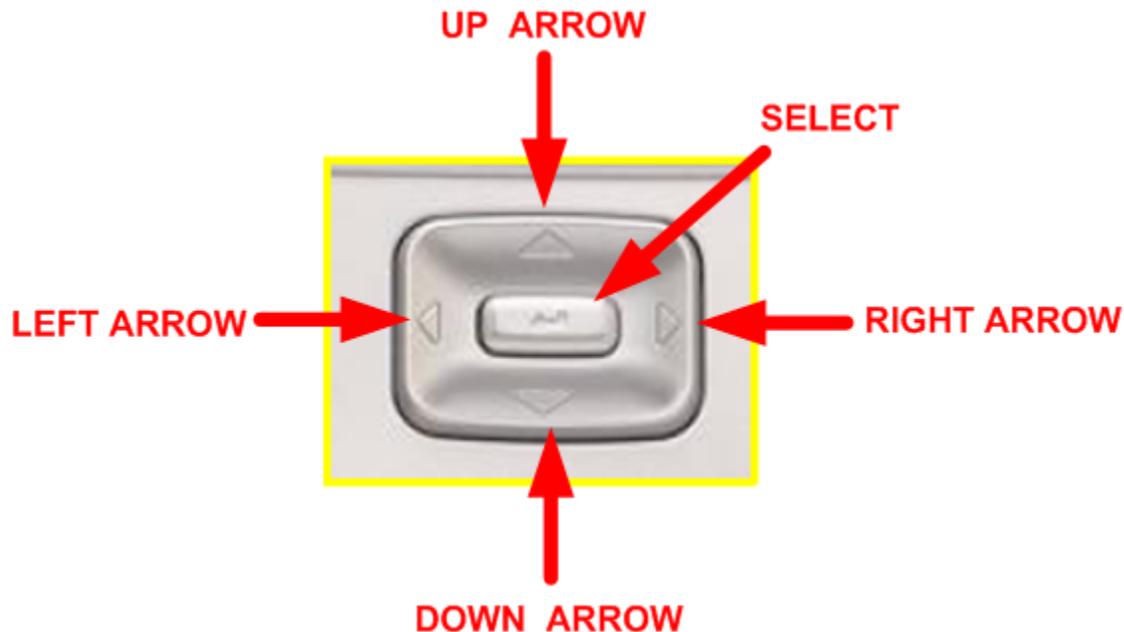

4. Press the **Right Arrow** key again. Make sure the port is set to **5000**.
5. Continue pressing the **Right Arrow** key until you are at **S2 IP** and then follow steps 6 and 7 to enter the appropriate IP address and port.
6. Press the **Apply** soft key at the bottom left of the screen. The phone will then restart.
7. Your phone should automatically login once it finishes rebooting. If the phone does not login, at the login screen, enter the users **10-digit Telephone Number** for the username prompt and press the **OK** soft key. Enter the users **Password** (last four digits of the telephone number followed by 99) at the password prompt and then press the **OK** soft key.
8. You have successfully configured the phone! You should now make a few test calls to ensure that everything is working ok.